




- 63A; 400V; IP 40; IK 08
- elegantní a odolné plastové rozvodnice
- montáž zápusné a nástěnné
- bílé nebo transparentní dvířka
- bezhalogenový termoplast
- odolnost proti ohni: smyčka 650° C
- kvalitní produkty za dobré ceny



typ 8692 / 8692PF
60x129x62

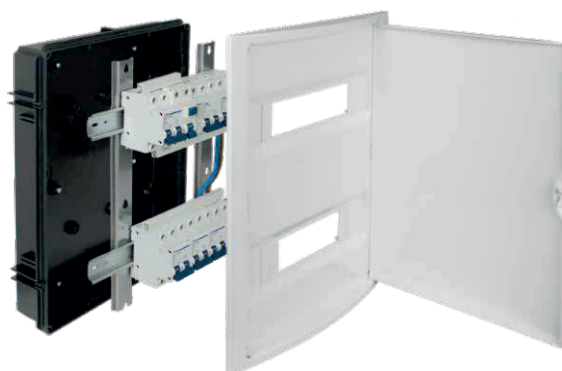

typ 8694 / 8694PF
125x195x72



typ 5108 / 5108PF
205x233x72



typ 8688 / 8688PF
277x220x72



typ 5012 / 5012PF
320x233x75



typ 8685 / 8685PF
386x225x72



typ 5250 / 5250PF
320x420x75



typ 8206 / 8206PF
400x320x72



typ 5260 / 5260PF
360x528x86



typ 5270 / 5270PF
320x670x75



typ 8692S / 8692SPF
62x140x85



typ 8684 / 8684PF
150x225x95



typ 5109 / 5109PF
247x249x104



typ 8703 / 8703PF
302x247x104



typ 5021 / 5021PF
362x250x104



typ 8704 / 8704PF
407x247x104



typ 5281 / 5281PF
362x438x104



typ 8216 / 8216PF
423x353x104



typ 5261 / 5261PF
362x544x104



typ 5271 / 5271PF
362x686x104